

INTRODUCTION

It is extremely complex to measure low pressures of at high process temperatures with Diaphragm Seals. The available fluids that can withstand these temperature and pressure conditions mostly have a very high viscosity. Additionally, when there is also a considerable capillary length (> 1 meter) required the viscosity of these fill fluids, certainly at lower ambient temperatures, becomes so high that the response time of the transmitter with Diaphragm Seal becomes unacceptable.




SOLUTION DEVELOPED

To overcome this problem Badotherm has designed a ‘Temperature Compensator’ solution. This description does not completely cover the functionality of the design because it not only compensates for temperature, but also for response time.

The Temperature Compensator is used to lower the response time in combination with long capillaries and extreme high or low temperatures. It uses a specially designed secondary diaphragm and two different fill fluids to meet high temperature specifications, and maintain acceptable response times specifications, and keep acceptable response times.

The compensator has a specially designed second diaphragm that is placed between the Diaphragm Seal and the transmitter. The first part between the Diaphragm Seal and the Temperature compensator is filled with high temperature fill fluid with a high viscosity. After the Temperature Compensator the process temperature is reduced to approximately ambient temperature and those conditions are acceptable for fill fluids with a low viscosity. The lower viscosity, even at lower ambient temperatures and longer capillary lengths, reduces the overall response time of the Diaphragm Seals System.

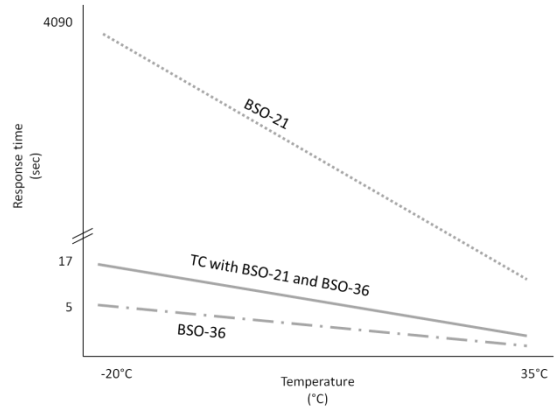


Example of Temperature Compensator with BSO-21 and BSO-36

The temperature compensator is available for all Diaphragm Seals to be combined with pressure transmitters.

CONSTRUCTION

The temperature compensator is available for in a direct mount construction as well as with capillary.

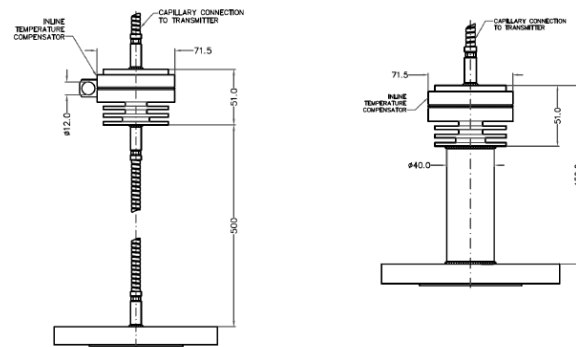



Holland – United Kingdom – Romania – India – Thailand – Dubai – USA

To our knowledge, the information contained herein is accurate as of the date of this document. However neither Badotherm, nor its affiliates makes any warranty, express or limited, or accepts any liability in connection with this information or its use. This information is for technical skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other product. The user alone finally determines suitability of any information or material in contemplated use, the manner of use and whether any patents are infringed. This information gives typical properties only.

Badotherm reserves the right to make changes to the specifications and materials without prior notice. The latest version of the datasheet can be found on www.badotherm.com.

© 2001 Badotherm, all rights reserved. Trademarks and/or other products referenced herein are either trademarks or registered trademarks of Badotherm.