

BSO 22 – Broad range silicone fill fluid

Description

BSO 22 fill fluid is the most commonly used silicone based fill fluid in industrial applications. The broad temperature range covers low as well as high temperatures for ambient and process. BSO 22 is seen as Badotherm's standard fill fluid.




Specifications

Commercial name	Fluid type	Viscosity* ¹	Density	Operating range	Design range* ²
BSO 22	Silicon	20.0 cSt	0.95 kg/dm ³	-50°C...225°C	-84°C...235°C

*1) Viscosity at 25°C

*2) Design range is suitable for non-continuous use with a cumulative exposure time of <12 hr.

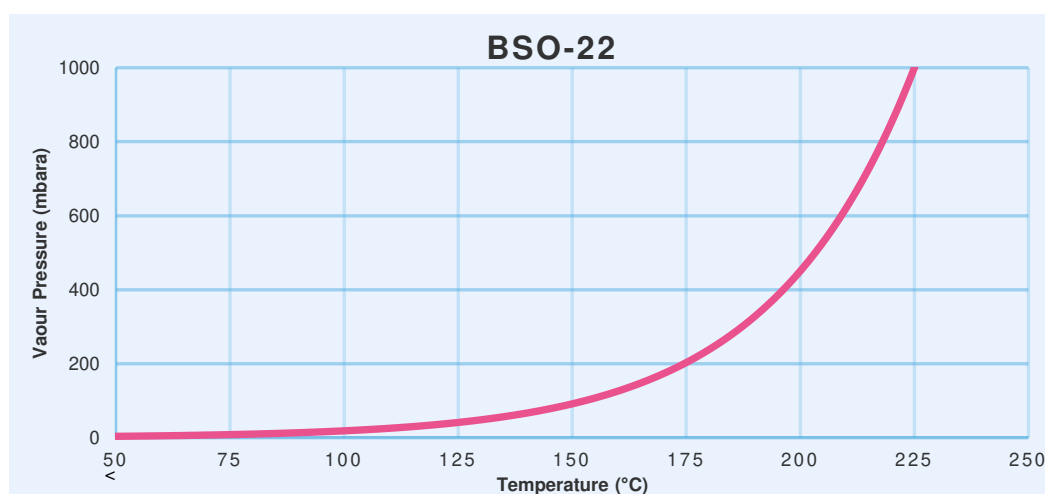

BSO 7022 22-2th of February 2023

Holland – Romania – India – Thailand – Dubai – USA

To our knowledge, the information contained herein is accurate as of the date of this document. However neither Badotherm, nor its affiliates makes any warranty, express or limited, or accepts any liability in connection with this information or its use. This information is for technical skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other product. The user alone finally determines suitability of any information or material in contemplated use, the manner of use and whether any patents are infringed. This information gives typical properties only. Badotherm reserves the right to make changes to the specifications any materials without prior notice. The latest version of the datasheet can be found on www.badotherm.com.

© 2019 Badotherm, all rights reserved. Trademarks and/or other products referenced herein are either trademarks or registered trademarks of Badotherm.