



# Diaphragm seals damaged?

Badotherm gives pressure instruments a second life



**BADOTHERM®**

Diaphragm seals are used to separate the pressure instrument from the process, to protect the vulnerable measuring element. This protection enhances the lifetime of the measuring instrument significantly. However it can happen that the diaphragm eventually breaks. One of the advantages of diaphragm seals is that they can be renewed, whilst re-using the pressure instrument. It will function just as a new instrument, but with the benefits of lower cost, and a much shorter lead time than buying a new instrument with seals. Badotherm has been supplying this service for over 25 years to the end users. All brands of transmitters with diaphragm seals can be sent back to Badotherm, because Badotherm operates independently of transmitter manufacturer. In addition to short lead times, we also offer rush repairs (within 48 hours) and when requested we analyze the defective instrument to learn what has happened and if we can improve the instrument to increase the reliability and lifetime in the future. Badotherm has over 30 years experience in mounting and filling diaphragm seals with pressure instruments, and specializes in the mounting and filling with pressure transmitters. Badotherm is the preferred supplier of several leading pressure transmitter manufacturers, where most applications end in the demanding chemical and petrochemical industries. The mounting and filling is done professionally according to stringent procedures, which also applies for repairs. All communication tools for the various communication protocols are in-house ( a.o. HART, FIELDBUS, D/E, BRAIN, Foxcom) as are the required machines and (calibration) test tools, with a 0,01% accuracy. Of course, Badotherm is ISO 9001 certified and is being audited annually.

#### When using diaphragm seals?

A diaphragm seal can be mounted to almost all pressure instruments. Mostly they are used in combination with pressure (differential) transmitters, but also in combination with pressure gauges and pressure switches. The use of diaphragm seals is recommended, when the process medium:

- Is aggressive, corrosive, toxic and/or highly viscous
- Has a (extremely) high or low temperature
- Has crystallization and/or polymerization

Diaphragm seals are also used for liquid level

measurements in pressure retaining tanks instead of 'wet legs'. Also they are used when in the process there is a chance of presence of hydrogen ions (H+) that can permeate the diaphragm. In those cases, a diaphragm seal with gold plating offers the required protection.

#### How does it work?

The pressure instrument is direct mounted or through a capillary line to the diaphragm seal. The complete volume of the diaphragm seal, the capillary and the measuring system, is filled under high vacuum with the appropriate filling fluid. The process pressure applied will be transferred through the diaphragm to the measuring system. The volume displacement has to be sufficient to steer the sensor of the transmitter or the bourdon tube of a pressure gauge. For an accurate measurement the relation between diaphragm diameter and volume displacement is important.

Making use of an in-house developed, high accuracy filling method, allowing for an optimal degassing of the filling fluids, Badotherm diaphragm seals have none or at most a negligible influence on the accuracy of the instrument.

#### Selection of filling fluid

The selection of the filling fluid is dependent on factors such as temperature, pressure, volume to be displaced (response time) and process safety. Most used filling fluids are silicone oil, glycerin, or vegetable oils. There are also special inert filling fluids, such as halocarbon for chloride and oxygen applications and other special filling fluids for high temperatures (up to 400 °C).





## BADOTHERM: DIAPHRAGM SEAL SPECIALIST



## EXAMPLES OF DAMAGED DIAPHRAGM SEALS



### Several types of diaphragm seals

There are several types of diaphragm seals, such as threaded and flanged executions, but also diaphragm seals with connections for sanitary requirements. Badotherm seals conform to several different standards, such as the ASME B16.5 or the EN1092-1 (used to be DIN standard), and even JIS executions are possible. Normally, the diaphragm seals are made from stainless steel AISI 316 (L), but often it is required that the diaphragm seal needs to be made of exotic material like Tantalum, Monel, Titanium, Duplex, Hastelloy C276 or Inconel 825. This can be for the diaphragm material only, but also for the complete wetted parts, being in contact with the process medium. Furthermore, it is possible to plate the diaphragm with a coating (PTFE, PFA or gold). Badotherm makes standard use of a diaphragm of 75 micron, allowing an increased flexibility and a higher accuracy.

### The influence of temperature

A pressure instrument with diaphragm seals is filled under high vacuum at a temperature of  $\pm 20\text{ }^{\circ}\text{C}$ . When the instrument with diaphragm seals is being used at an operating temperature different to this, a measurement error will occur. When the process and/or ambient temperature increase, the filling fluid will expand resulting in a pressure build up, that will be measured by the pressure retainer on top of the actual process pressure. On request, Badotherm can determine the expected additional measurement error of an application so it can be compensated in the system. It is also possible to get a reliable measurement, where the pressure instrument will be set at a given operating process temperature.

### Usage of capillary lines

The diaphragm seals and the pressure instrument can be connected by means of a stainless steel capillary with flexible stainless steel armour. Any reasonable length of capillary is possible. For the best result, the length of capillary should be carefully selected. A too long capillary influences the accuracy of the measurement negatively.



#### Diaphragm is corroded

It happens frequently that the diaphragm is bulged. A possible cause could be that the process temperature has been too high and the filling fluid has cooked, resulting in a bulged diaphragm. Check the temperature specifications of the datasheet with the process. Another possible cause is the presence of hydrogen diffusion. This means that very small hydrogen ions (H+) have permeated the diaphragm and joined together again behind the diaphragm, resulting in a bulged diaphragm. Of course, the measurement is no longer correct. The solution preventing hydrogen permeation is a gold plated diaphragm. Badotherm offers a unique 40  $\mu\text{m}$  layer, ensuring a longer lifetime.



#### Diaphragm is "blown up"

Sometimes a diaphragm is "blown up". This can be caused by a high pressure water jet stream directed at the diaphragm, but it can also be a sign that the application has leaked and/or is on a vacuum. Extra care should be taken into account for installation, mounting and/or maintenance to prevent this problem from recurring.

#### Diaphragm is corroded

Some processes are so aggressive that they corrode the diaphragm material. A correct selection of diaphragm material ensures a longer lifetime. Badotherm can assist and advise in making the selection. All types of diaphragm materials are available from Badotherm (amongst which are Monel K400, Inconel, Duplex, AISI 316, AISI 321 en Hastelloy C276). Also exotic flange materials are readily available.



#### Damaged (dents) diaphragms

The diaphragm has a thickness of only 75 micron and thus accurately transmits the pressure. However, it is also very sensitive and vulnerable and needs to be handled with care. In case the diaphragm is dented, it no longer gives a correct reading. A renewal of the diaphragm seal is the solution. In the example of an extended type (see picture) the diaphragm can be removed, the flange cleaned and machined, and a new diaphragm is welded to it, then, the complete application is mounted and filled and tested. The instrument is as good as new.



#### Process medium gets behind the diaphragm

When the diaphragm is damaged and the process medium gets behind the diaphragm a hazardous situation can exist. Because the complete system stays more or less liquid filled and continues to transmit a (process) pressure. This could give the wrong impression that the application is still functioning correctly. In the meantime, the process medium could corrode the flange material, which could lead to a dangerous situation. A periodic check to see if the diaphragm is still in perfect condition is recommended, especially with corrosive processes.

#### Development of customer specific requirements

For specific applications, Badotherm develops together with the customer a joint solution for a "measurement challenge" Recently a customer asked Badotherm for a specific construction due to the limited space in the plant. Here the transmitter was placed in the radius of the diaphragm seal flange instead of the standard construction where the instrument is placed axial to the flange.







## THE BENEFITS OF RENEWING DIAPHRAGM SEALS

- All brands of pressure transmitters are accepted and new diaphragm seals can be mounted to them. Consequently, there is only one central contact for diaphragm seals (repairs)
- As standard, any repair is executed within 3 weeks of receipt of the instrument, but a 48 hours service is also possible. Ideal in case of sudden plant-stops or any other unplanned and urgent situations when the only alternative is a new instrument on a long delivery and with extra cost
- Significantly more economic than ordering the instrument completely new again, because the pressure instrument is being reused.
- A clear and written quotation, so a clear insight in the cost and actions beforehand.
- Before executing the order, the transmitter is tested for proper functioning, so there is never unnecessary cost for a repair executed in vain.
- Badotherm offers advice with measurement challenges for diaphragm seals. A repair / renewal of diaphragm seals of ten provide valuable information regarding the process and offers the opportunity of a better solution for increased life-time and/or higher accuracy.

4. In most situations all parts are being renewed. However, on some occasions, for instance exotic flange materials, together with the customer it can be decided to re-use these parts.
5. The parts are always cleaned and when required machined. The gaskets are always checked and/or replaced. Surface facings are always cleaned and revised.
6. The application is rebuilt, filled and tested on static pressure and measuring range (documented in a test report which is always included). The complete instrument is again working perfectly and conforms to the original specifications. Material certificates according EN10204 will be supplied when requested on the order.
7. The instrument can be shipped to any location, to be used again on its new life-cycle.

### How do I contact Badotherm?


Please contact your nearest Badotherm office. See the back of this folder.

You can send the instrument to be repaired (cleaned) to the nearest Badotherm service center with the instrument datasheet and with your contact details.

We will contact you shortly.

### 7 steps to an instrument as good as new

1. After receipt of the repair, a quotation will be sent to you within 48 hours.
2. Only after approval of the quotation, will the order be executed.
3. The diaphragm seal is carefully dismantled and the pressure instrument will be tested for correct (electronic) functioning. This way, a repair is never started in vain.

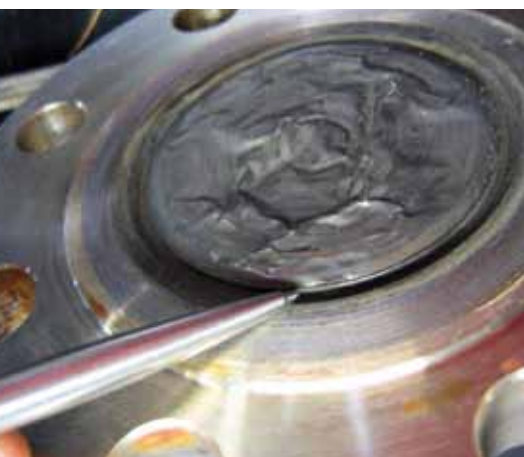

## TRANSMITTERS WITH DAMAGED DIAPHRAGM SEALS? SEND THEM TO BADOTHERM!

### About Badotherm

Badotherm, founded in 1957 and located in Dordrecht, the Netherlands, is a manufacturer of high quality mechanical process instrumentation. It is still a family owned business, with a long term vision and quality and integrity engraved in our DNA. Nowadays the 3rd generation has entered the company and the continuity and business values are safeguarded. It all started with the repair of pressure and temperature gauges, and from there Badotherm has always chosen to supply and manufacture quality products and services. Since the 80's a new specialism was added, being the mounting and filling of diaphragm seal systems (pressure transmitters, pressure gauges and pressure switches). Maintenance and repair of these products is a service that has also been offered since. Badotherm has an independent position in the market towards the pressure transmitter manufacturers and operates brand neutral. Our expertise, quality and service has made Badotherm the preferred supplier around the world for several leading transmitter manufacturers to mount and fill our diaphragm seals to their transmitters. Badotherm focuses mainly on the chemical, petrochemical and the oil & gas industries. We offer our products and services in several regions around the world. Badotherm has 225 employees in 6 global offices to support our customers in their regions regarding instrumentation and for mounting diaphragm seals to pressure instruments.



[www.badotherm.com](http://www.badotherm.com)

#### Europe

Badotherm Holland  
Kelvinstraat 13  
3316 GM Dordrecht  
P.O. box 485  
The Netherlands  
Tel +31 (0)78 654 5800  
Fax +31 (0)78 654 5837

#### Middle East

Badotherm Middle East FZCO  
RA08WF04,  
P.O. box 18576  
Jebel Ali Dubai  
United Arab Emirates  
Tel +971 488 734 14  
Fax +971 488 734 15

#### South Asia

Badotherm India  
92B-93B sector 5, HSIDC IMT  
Manesar,  
Haryana, Delhi  
India  
Tel +91 124 229 10 53  
Fax +91 124 229 08 84

#### Far East

Badotherm Far East Ltd.  
254 Soi Onnuch 40  
Sukhumvit 77, P.O. box 18,  
Suanluang 10253  
Bangkok 10250, Thailand  
Tel +66 2 730 65 00  
Fax +66 2 730 65 05

Holland - United Kingdom - Romania - India - Thailand - Dubai