

Accessories – Flanged process connector

Description

Not all processes require diaphragm seals, or some process can simply be measured without the use of a diaphragm seal. For this reason Badotherm offers a broad range of flanged process connectors. This is an adapter product from flange to various instrument connections such as threaded, welded, and to compression fittings.

Material of construction

The FPC products can be made from all available materials. Most common is the use of AISI316(L) material. In case of corrosive processes we strongly advice the use of diaphragm seal applications.

Instrument connections

Threaded serie


FPC-T products are made from blind flanges on which an adapter nipple is welded to make the flange suitable for mounting of threaded products such as pressure transmitters and pressure gauges. Independently on the flange size and class G, NPT, or metrical nipples can be welded to the flange. The standard sizes of the nipples are

Type	Thread
FPC-TMN12	½" NPT-male
FPC-TFG12	G½ (female)
FPC-TFN12	½" NPT-female
FPC-TFG14	G ¼ (female)

Compression fitting serie

FPC-CF products are made from bar stock which has an integrated compression fitting in the on the process flange. We use only systems from Swagelok or Parker. The standard sizes of the nipples are

Type	Size
FPC-CFI38	3/8" pipe compression fitting
FPC-CFI12	½" pipe compression fitting
FPC-CFM10	10mm pipe compression fitting
FPC-CFM12	12mm pipe compression fitting

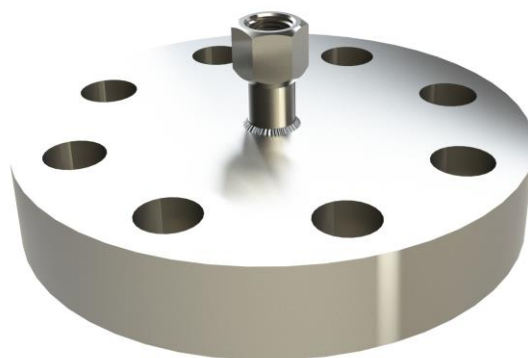

Marking

All parts are marked in order to identify the material of construction, or heat number when applicable.


Flange size, rating and facings - ASME B16.5

ASME B16.5			
Size	Rating	Facing	Roughness
0.5" to 4"	cl. 150 - cl.2500	RF, LMF, FF, SGF	Ra 3.2-6.3 µm
		RJF, SFF	Ra <1.6 µm
		SMF, LTF, STF, LGF, LFF	Ra <3.2 µm

Flange size, rating and facings - EN 1092-1


EN 1092-1			
Size	Rating	Type	Roughness
DN15 to DN100	PN10-400	A, B1, E, F	Ra 3.2-12.5 µm
		B2, C, D, G, H	Ra <0.8-3.2 µm

Dimensions table: Threaded connection with ASME B16.5 type RF flange facing

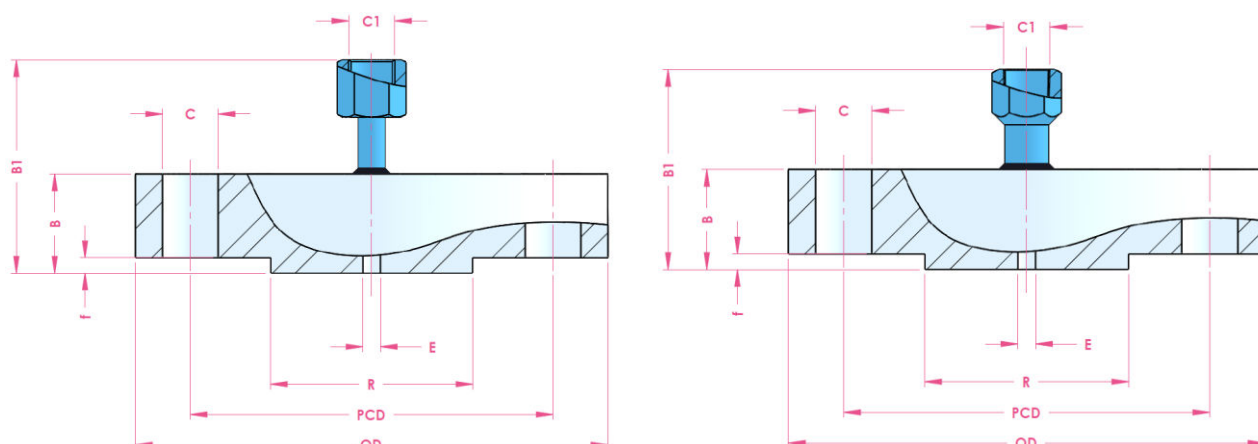


size	rating	OD	B	B1	PCD	C / pcs	E	R	f	weight
0.5"	cl. 150	89.0	11.7	41.7	60.5	15.9 / 4x	8.0	35.1	2.0	0.9
	cl. 300	95.0	14.7	44.7	66.5	15.9 / 4x				1.4
	cl. 400-600		21.2	51.7					1.6	
	cl. 900-1500		121.0	29.4	59.4	82.6			22.3 / 4x	3.6
	cl. 2500	133.0	37.2	67.2	88.9	5.0				
3/4"	cl. 150	99.0	13.2	43.2	69.8	15.9 / 4x		42.9	2.0	0.9
	cl. 300	117.0	16.2	46.2	82.6	19.1 / 4x				1.4
	cl. 400-600		22.7	52.7					1.6	
	cl. 900-1500		130.0	32.4	62.4	88.9			22.3 / 4x	3.6
	cl. 2500	140.0	38.8	68.8	95.2	5.0				
1"	cl. 150	110.0	14.7	54.7	79.4	15.9 / 4x		50.8	2.0	0.9
	cl. 300	125.0	17.9	57.9	88.9	19.1 / 4x				1.4
	cl. 400-600		24.5	64.5					1.6	
	cl. 900-1500		150.0	35.6	75.6	101.6			25.4 / 4x	3.6
	cl. 2500	160.0	42.0	82	108.0	5.0				
1.25"	cl. 150	115.0	17.9	57.9	88.9	15.9 / 4x		63.5	2.0	1.2
	cl. 300	135.0	19.5	59.5	98.4	19.1 / 4x				1.8
	cl. 400-600		27.7	67.7					2.2	
	cl. 900-1500		160.0	35.6	75.6	111.1			25.4 / 4x	4.1
	cl. 2500	185.0	45.1	85.1	130.2	28.6 / 4x			7.4	
1.5"	cl. 150	125.0	17.9	57.9	98.4	15.9 / 4x		73.0	2.0	1.5
	cl. 300	155.0	21.1	61.1	114.3	22.3 / 4x				2.7
	cl. 400-600		29.3	69.3					3.3	
	cl. 900-1500		180.0	38.8	78.8	123.8			28.6 / 4x	5.8
	cl. 2500	205.0	51.5	91.5	146.0	31.8 / 4x			10.4	
2"	cl. 150	150.0	19.5	59.5	120.7	19.1 / 4x		92.1	2.0	2.4
	cl. 300	165.0	22.7	62.7	127.0	19.1 / 8x				3.2
	cl. 400-600		32.4	72.4					4.2	
	cl. 900-1500		215.0	45.1	85.1	165.1			25.4 / 8x	10.1
	cl. 2500	235.0	57.9	97.9	171.4	28.6 / 8x			15.6	
3"	cl. 150	190.0	24.3	64.3	152.4	19.1 / 4x		127.0	2.0	4.9
	cl. 300	210.0	29.0	69	168.3	22.3 / 8x				6.8
	cl. 400-600		38.8	78.8					8.4	
	cl. 900		240.0	45.1	85.1	190.5			25.4 / 8x	13.1
	cl. 1500	265.0	54.7	94.7	203.2	31.9 / 8x			19.1	
4"	cl. 2500	305.0	73.7	113.7	228.6	35.0 / 8x		157.2	2.0	34.8
	cl. 150	230.0	24.3	64.3	190.5	19.1 / 8x				7.0
	cl. 300	255.0	32.2	72.2	200.0	22.3 / 8x			11.5	
	cl. 400		42.0	82					14.8	
	cl. 600		275.0	45.1	85.1	215.9			25.5 / 8x	17.3
	cl. 900	290.0	51.5	91.5	235.0	31.8 / 8x			26.9	
	cl. 1500	310.0	61.0	101	241.3	34.9 / 8x			29.9	
cl. 2500	355.0	83.2	123.2	273.0	41.3 / 8x	53.9				

Dimensions table: Compression fitting with ASME B16.5 type RF flange facing

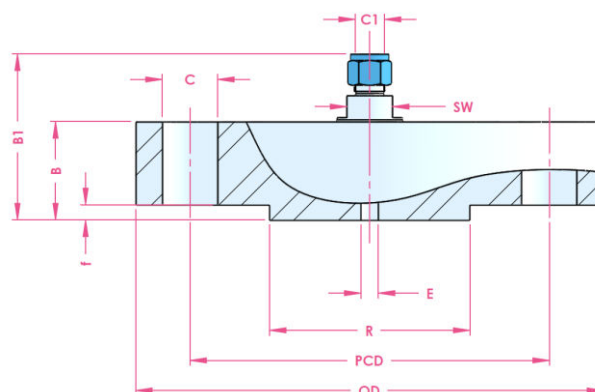


size	rating	OD	B	B1	PCD	C / pcs	E	R	f	weight
0.5"	cl. 150	89.0	11.7	41.7	60.5	15.9 / 4x	8.0	35.1	2.0	0.9
	cl. 300	95.0	14.7	44.7	66.5	15.9 / 4x				1.4
	cl. 400-600		21.2	51.7					7.0	1.6
	cl. 900-1500	121.0	29.4	59.4	82.6	3.6				
	cl. 2500	133.0	37.2	67.2	88.9	22.3 / 4x				5.0
3/4"	cl. 150	99.0	13.2	43.2	69.8	15.9 / 4x		42.9	2.0	0.9
	cl. 300	117.0	16.2	46.2	82.6	19.1 / 4x				1.4
	cl. 400-600		22.7	52.7					7.0	1.6
	cl. 900-1500	130.0	32.4	62.4	88.9	22.3 / 4x				3.6
	cl. 2500	140.0	38.8	68.8	95.2	5.0				
1"	cl. 150	110.0	14.7	54.7	79.4	15.9 / 4x		50.8	2.0	0.9
	cl. 300	125.0	17.9	57.9	88.9	19.1 / 4x				1.4
	cl. 400-600		24.5	64.5					7.0	1.6
	cl. 900-1500	150.0	35.6	75.6	101.6	25.4 / 4x				3.6
	cl. 2500	160.0	42.0	82	108.0	5.0				
1.25"	cl. 150	115.0	17.9	57.9	88.9	15.9 / 4x		63.5	2.0	1.2
	cl. 300	135.0	19.5	59.5	98.4	19.1 / 4x				1.8
	cl. 400-600		27.7	67.7					7.0	2.2
	cl. 900-1500	160.0	35.6	75.6	111.1	25.4 / 4x				4.1
	cl. 2500	185.0	45.1	85.1	130.2	28.6 / 4x				7.4
1.5"	cl. 150	125.0	17.9	57.9	98.4	15.9 / 4x		73.0	2.0	1.5
	cl. 300	155.0	21.1	61.1	114.3	22.3 / 4x				2.7
	cl. 400-600		29.3	69.3					7.0	3.3
	cl. 900-1500	180.0	38.8	78.8	123.8	28.6 / 4x				5.8
	cl. 2500	205.0	51.5	91.5	146.0	31.8 / 4x				10.4
2"	cl. 150	150.0	19.5	59.5	120.7	19.1 / 4x		92.1	2.0	2.4
	cl. 300	165.0	22.7	62.7	127.0	19.1 / 8x				3.2
	cl. 400-600		32.4	72.4					7.0	4.2
	cl. 900-1500	215.0	45.1	85.1	165.1	25.4 / 8x				10.1
	cl. 2500	235.0	57.9	97.9	171.4	28.6 / 8x				15.6
3"	cl. 150	190.0	24.3	64.3	152.4	19.1 / 4x		127.0	2.0	4.9
	cl. 300	210.0	29.0	69	168.3	22.3 / 8x				6.8
	cl. 400-600		38.8	78.8					7.0	8.4
	cl. 900	240.0	45.1	85.1	190.5	25.4 / 8x				13.1
	cl. 1500	265.0	54.7	94.7	203.2	31.9 / 8x				19.1
4"	cl. 2500	305.0	73.7	113.7	228.6	35.0 / 8x		157.2	7.0	34.8
	cl. 150	230.0	24.3	64.3	190.5	19.1 / 8x	7.0			
	cl. 300	255.0	32.2	72.2	200.0	22.3 / 8x	11.5			
	cl. 400		42.0	82			25.5 / 8x			14.8
	cl. 600	275.0	45.1	85.1	215.9	31.8 / 8x	17.3			
	cl. 900	290.0	51.5	91.5	235.0		26.9			
	cl. 1500	310.0	61.0	101	241.3		34.9 / 8x			29.9
	cl. 2500	355.0	83.2	123.2	273.0	41.3 / 8x	53.9			

Dimensions table: Threaded connection with EN 1092-1 type B1 flange facing

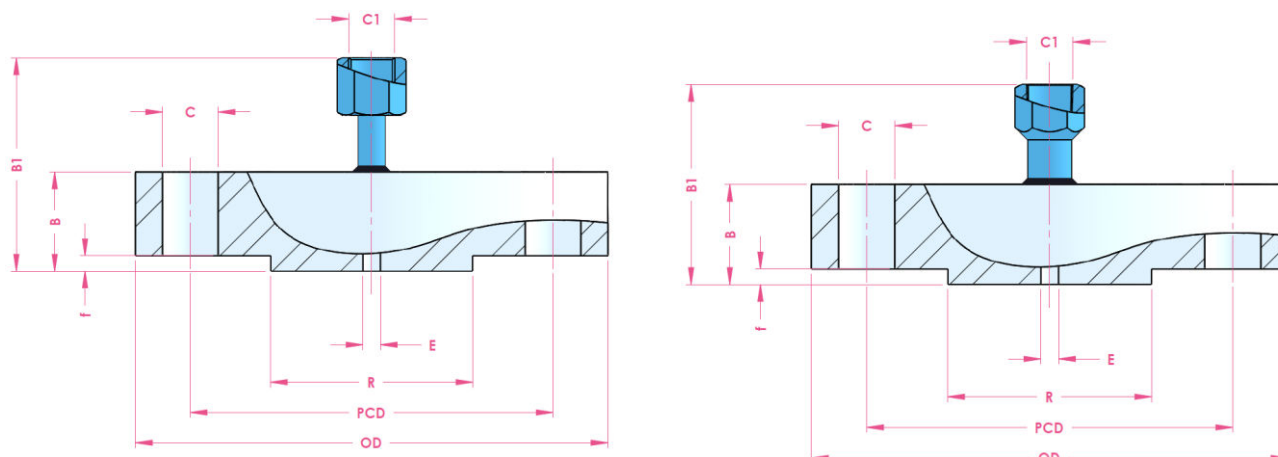

size	rating	OD	B	B1	PCD	C / pcs	R	f	Weight
DN15	PN10-40	95.0	16.0	46.0	75.0	14.0 / 4x	45.0		1.0
	PN63-100	105.0	20.0	50.0	75.0		45.0		2.0
DN20	PN10-40	105.0	18.0	48.0	75.0	18.0 / 4x	58.0		1.0
	PN63-100	130.0	22.0	52.0	90.0		58.0		2.0
DN25	PN10-40	115.0	18.0	48.0	85.0	14.0 / 4x	68.0	2.0	1.0
	PN63-100	140.0	24.0	54.0	100.0	18.0 / 4x			2.5
	PN160								2.7
	PN250	150.0	28.0	58.0	105.0	22.0 / 4x			3.6
	PN320	160.0	34.0	64.0	115.0				5.2
	PN400	180.0	38.0	68.0	130.0	26.0 / 4x			7.5
DN32	PN10-40	140.0	18.0	48.0	100.0	18.0 / 4x	78.0		2.0
	PN63-100	155.0	24.0	54.0	110.0	22.0 / 4x			3.0
DN40	PN10-40	150.0	18.0	48.0		18.0 / 4x	88.0	3.0	2.0
	PN63-100	170.0	26.0	56.0	125.0	22.0 / 4x			4.0
	PN160		28.0	58.0					4.4
	PN250	185.0	34.0	64.0	135.0	26.0 / 4x			6.7
	PN320	195.0	38.0	68.0	145.0				8.7
	PN400	220.0	48.0	78.0	165.0	30.0 / 4x			14.1
DN50	PN10-40	165.0	20.0	50.0	125.0	18.0 / 4x	102.0	3.0	3.0
	PN63	180.0	26.0	56.0	135.0	22.0 / 4x			4.5
	PN100	195.0	28.0	58.0	145.0	26.0 / 4x			6.0
	PN160		30.0	60.0					6.4
	PN250	200.0	38.0	68.0	150.0	26.0 / 8x			8.2
	PN320	210.0	42.0	72.0	160.0				10.7
DN80	PN400	235.0	52.0	82.0	180.0	30.0 / 8x	138.0	3.0	16.7
	PN10-40	200.0	24.0	54.0	160.0	18.0 / 8x			5.0
	PN63	215.0	28.0	58.0	170.0	22.0 / 8x			6.5
	PN100	230.0	32.0	62.0	180.0	26.0 / 8x			9.0
	PN160	230.0	36.0	66.0					10.3
	PN250	255.0	46.0	76.0	200.0	30.0 / 8x			16.5
DN100	PN320	275.0	55.0	85.0	220.0		162.0	3.0	25.4
	PN400	305.0	68.0	98.0	240.0	33.0 / 8x			38.4
	PN10-16	220.0	20.0	50.0	180.0	18.0 / 8x			4.5
	PN25-40	235.0	24.0	54.0	190.0	22.0 / 8x			6.5
	PN63	250.0	30.0	60.0	200.0	26.0 / 8x			9.0
	PN100	265.0	36.0	66.0	210.0	30.0 / 8x			13.0
	PN160		40.0	70.0					15.3
	PN250	300.0	54.0	84.0	235.0	33.0 / 8x			27.2
	PN320	335.0	65.0	95.0	265.0	36.0 / 8x			42.5
	PN400	370.0	80.0	110.0	295.0	39.0 / 8x			67.3

Dimensions table: Compression fitting with EN 1092-1 type B1 flange facing

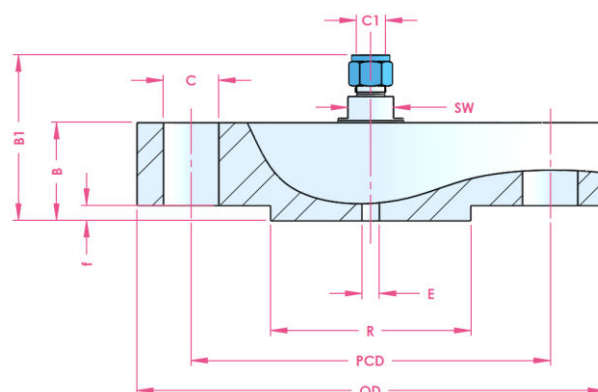

size	rating	OD	B	PCD	C / pcs	R	f	Weight
DN15	PN10-40	95.0	16.0	75.0	14.0 / 4x	45.0	2.0	1.0
	PN63-100	105.0	20.0	75.0		45.0		2.0
DN20	PN10-40		18.0	75.0	18.0 / 4x	58.0		1.0
	PN63-100	130.0	22.0	90.0		58.0		2.0
DN25	PN10-40	115.0	18.0	85.0	14.0 / 4x	68.0		1.0
	PN63-100	140.0	24.0	100.0	18.0 / 4x			2.5
	PN160		28.0	105.0	22.0 / 4x			2.7
	PN250	150.0	34.0	115.0	26.0 / 4x			3.6
	PN320	160.0	38.0	130.0	26.0 / 4x			5.2
	PN400	180.0	48.0	165.0	30.0 / 4x			7.5
DN32	PN10-40	140.0	18.0	100.0	18.0 / 4x	78.0	3.0	2.0
	PN63-100	155.0	24.0	110.0	22.0 / 4x			3.0
DN40	PN10-40	150.0	18.0	110.0	18.0 / 4x	88.0		2.0
	PN63-100	170.0	26.0	125.0	22.0 / 4x			4.0
	PN160		28.0	135.0	26.0 / 4x			4.4
	PN250	185.0	34.0	145.0	26.0 / 4x			6.7
	PN320	195.0	38.0	160.0	30.0 / 8x			8.7
	PN400	220.0	48.0	165.0	30.0 / 4x			14.1
DN50	PN10-40	165.0	20.0	125.0	18.0 / 4x	102.0	3.0	3.0
	PN63	180.0	26.0	135.0	22.0 / 4x			4.5
	PN100	195.0	28.0	145.0	26.0 / 4x			6.0
	PN160	200.0	38.0	150.0	26.0 / 8x			6.4
	PN250	210.0	42.0	160.0	30.0 / 8x			8.2
	PN320	235.0	52.0	180.0	33.0 / 8x			10.7
DN80	PN10-40	200.0	24.0	160.0	18.0 / 8x	138.0	3.0	16.7
	PN63	215.0	28.0	170.0	22.0 / 8x			5.0
	PN100	230.0	32.0	180.0	26.0 / 8x			6.5
	PN160	230.0	36.0	200.0	30.0 / 8x			9.0
	PN250	255.0	46.0	220.0	33.0 / 8x			10.3
	PN320	275.0	55.0	240.0	36.0 / 8x			16.5
	PN400	305.0	68.0	295.0	39.0 / 8x			25.4
DN100	PN10-16	220.0	20.0	180.0	18.0 / 8x	158.0	3.0	38.4
	PN25-40	235.0	24.0	190.0	22.0 / 8x			4.5
	PN63	250.0	30.0	200.0	26.0 / 8x			6.5
	PN100	265.0	36.0	210.0	30.0 / 8x			9.0
	PN160	300.0	54.0	235.0	33.0 / 8x			13.0
	PN250	335.0	65.0	265.0	36.0 / 8x			15.3
	PN400	370.0	80.0	295.0	39.0 / 8x			27.2
							42.5	
							67.3	

Product code ASME FPC Flanges

Code							
Example code:	FPC A	08	A1	RF	S316	N12F	W
Standard							
ASME B16.5	A						
Size							
0.5"	01						
3/4"	1A						
1"	02						
1.5"	04						
2"	05						
3"	08						
4"	10						
Class							
cl. 150	A1						
cl. 300	A2						
cl. 400 ^{*1}	A3						
cl. 600	A4						
cl. 900 ^{*2}	A5						
cl. 1500	A6						
cl. 2500	A7						
Facing							
Raised Face ◀	RF						
Ring Joint Face	RJF						
Material							
AISI 316(L) ◀	S316						
Alloy C276	A276						
AISI 321	S321						
Alloy 400	A400						
Alloy 825	A825						
254 SMO (F44)	DF44						
Duplex (F51)	DF51						
Super Duplex (F53)	SF53						
Duper Duplex (F55)	SF55						
Instrument Connection							
G1/4 Rotating nut	G14R						
G1/2 Rotating nut	G12R						
G 1/2 ^{*3}	G12F						
1/4" NPT female ^{*3}	N14F						
1/2" NPT female ^{*3}	N12F						
1/2" NPT male (welded)	N12M						
3/8" tube Compression fitting	CI38						
1/2" tube Compression fitting	CI12						
10mm tube Compression fitting	CM10						
12mm tube Compression fitting	CM12						
Fitting method							
PTFE tape	P						
Grafoil tape	G						
SWAK®	S						
Welded	W						

SWAK® is a trademark of Swagelok

*1 For size ≥4"

*2 For size ≥3"

*3 Connections for option "Welded". The 1/2" NPT-male version is always welded).

Product code EN FPC Flanges

Code							
Example code:	FPC E	27	D4	B1	S316	N12F	W
Standard							
EN 1092-1	E						
Size							
DN25	24						
DN40	26						
DN50	27						
DN80	29						
DN100	30						
Class							
PN 10-16 ^{*1}	D2						
PN 25-40 ^{*1}	D3						
PN 10-40	D4						
PN 63	D5						
PN 100	D6						
PN 250	D7						
PN 400	D8						
Facing^{*2}							
Raised Face ◀	B1						
Material							
AISI 316(L) ◀	S316						
Alloy C276	A276						
AISI 321	S321						
Alloy 400	A400						
Alloy 825	A825						
254 SMO (F44)	DF44						
Duplex (F51)	DF51						
Super Duplex (F53)	SF53						
Duper Duplex (F55)	SF55						
Flush Connection Quantity							
Instrument Connection							
G1/4 Rotating nut	G14R						
G1/2 Rotating nut	G12R						
G 1/2 ^{*3}	G12F						
1/4" NPT female ^{*2}	N14F						
1/2" NPT female ^{*2}	N12F						
1/2" NPT male (welded)	N12M						
3/8" tube Compression fitting	CI38						
1/2" tube Compression fitting	CI12						
10mm tube Compression fitting	CM10						
12mm tube Compression fitting	CM12						
Fitting method							
PTFE tape	P						
Grafoil tape	G						
SWAK®	S						
Welded	W						

SWAK® is a trademark of Swagelok

^{*1} For size ≥DN100

^{*2} Connections for option "Welded". The 1/2" NPT-male version is always welded).

Table 1: Additional Facing

Description	code
Large Male Face	LMF
Small Male Face	SMF
Flat Face	FF
Large Tongue Face	LTF
Small Tongue Face	STF
Large Groove Face	LGF
Small Groove Face	SGF
Large Female Face	LFF
Small Female Face	SFF

Description	code
Flat Face	A
Raised face (smooth finish)	B2
Tongue	C
Groove	D
Spigot	E
Recess	F

For the Groove and Tongue Facings the instrument and process and side are the opposites
(eg Instrument side is LTF then Process side is LGF)

Table 2: Options

Option (start options with X_)	code
Cleaned from Oil and Grease	_K1
NACE ISO 15156 (MR 01 75)	_N75
Position 2 mounted valves	_VP2
3.1 material certificate	_IC31
2.1 Pressure leak test certificate standard pressure* ¹	_LTPS
2.1 Pressure leak test certificate acc PED 2014/68/EU* ¹	_LTCE
2.1 Penetrant test certificate* ²	_PT1
2.2 Positive Material Identification	_PMI
2.2 Welding documents (WPS/PQR)* ²	_WPS

*1: For fitted or welded with and instrument

*2: Only for welded connections

Change log

Date	Change
23-5-2023	Added 0.5" and ¾" flange connection ,

ACC 7002 – 23rd of May 2023

Holland – Romania – India – Thailand – Dubai – USA

To our knowledge, the information contained herein is accurate as of the date of this document. However neither Badotherm, nor its affiliates makes any warranty, express or limited, or accepts any liability in connection with this information or its use. This information is for technical skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other product. The user alone finally determines suitability of any information or material in contemplated use, the manner of use and whether any patents are infringed. This information gives typical properties only. Badotherm reserves the right to make changes to the specifications any materials without prior notice. The latest version of the datasheet can be found on www.badotherm.com.

© 2015 Badotherm, all rights reserved. Trademarks and/or other products referenced herein are either trademarks or registered trademarks of Badotherm.